
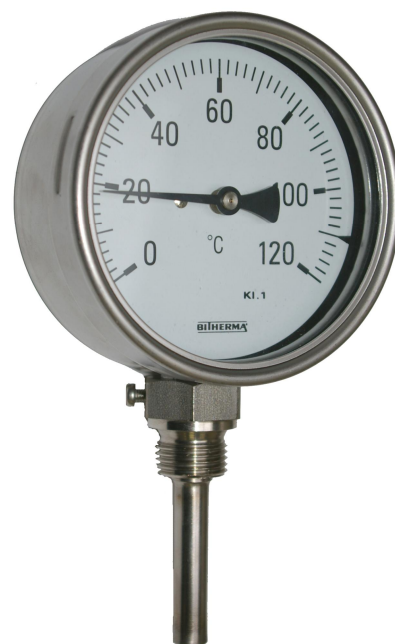


**BIMETAL DIAL THERMOMETERS
PROCESS INDUSTRY VERSION, STEM VERTICAL
ALL STAINLESS STEEL**

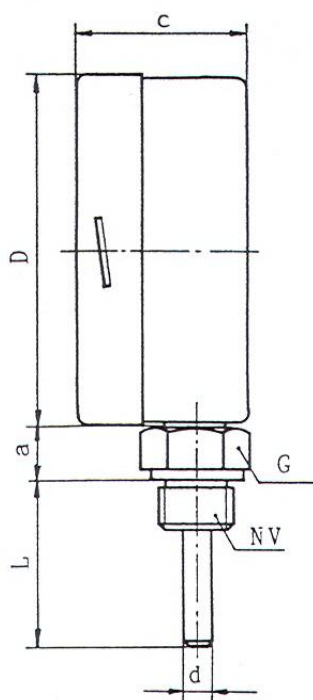

DIMENSIONAL DATA IN MM.							L=STD.IMMERSION TUBE 45, 50, 60, 80, 100 120, 160, 200, 300
TYPE NO.	D	c	a	NV	G	d	
020.063	63	41	12	24	1/4" RG	12	
020.080	80	42,5	12	24	1/2" RG	12	
020.100	100	47,5	12	24	1/2" RG	12	
020.160	160	48,5	12	24	1/2" RG	12	

CASE AND BEZEL	: Stainless steel with bayonet lock ring (1.4301)
DIAL	: White with black markings. 270 ° defl
PROTECTION	: IP 54
STEM	: ø 8 mm. Stainless steel with adjusting screw.
POCKET	: 1/2" BSP Stainless steel ø 10 mm.
ACCURACY	: 1,0 (EN 13 190)

RANGES °C	GRADUATION	RANGES °C	GRADUATION	RANGES °C	GRADUATION
-40 + 40	: 1	0 - 50	: 1	0 - 200	: 2
-30 + 50	: 1	0 - 60	: 1	0 - 250	: 5
-20 + 60	: 1	0 - 80	: 1	0 - 300	: 5
-15 + 45	: 1	0 - 100	: 2	0 - 400	: 5
-10 + 60	: 1	0 - 120	: 2	0 - 500	: 5
0 - 40	: 1	0 - 160	: 2	0 - 600	: 10

OPTIONS FOR BIMETAL THERMOMETERS :

- Surface mounting flange
- Panel mounting flange
- One-way reset maximum pointer
- Alarm contact
- Glycerine filling
- Scale range °F or °C+°F
- Other pipe threads
- Red mark on dial