


DISTANT READING THERMOMETERS FOR SURFACE MOUNTING

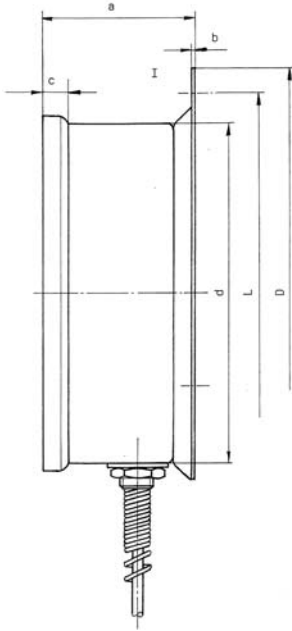

DIMENSIONAL DATA IN MM.							
TYPE NR.	d	D	L	I	a	b	c
1063 H	63	86	75	3,6	40	0,9	4
1080 H	80	110	95	3,6	42	0,9	4
1100 H	100	132	116	4,8	46	1,5	8
1160 H	160	196	178	5,8	48	6,8	-

CASE	: Stainless steel. (Type No. 1160 PVC-coated steel), with back adjusting screw
BACK FLANGE RING	: Stainless steel. (Type No. 1160 PVC-coated steel)
DIAL	: White with black markings. 270 ° defl.
SYSTEM	: Double wounded spring with bimetal compensation
CAPILLARY TUBE	: Plastic covered. Over 120 ° : copper-flex
LENGTH	: 0,5 ...- 10,0 meter.
BULBS	: See datasheet 3.0 B
ACCURACY	: 2,0 (EN 13 190)

RANGES °C	GRADUATION	RANGES °C	GRADUATION	RANGES °C	GRADUATION
-40 + 40	: 2	0 - 120	: 2	+50 - 250	: 5
-30 + 50	: 2	0 - 150	: 5	+50 - 350	: 5
0 - 40	: 1	0 - 200	: 5	+100 - 200	: 2
0 - 60	: 1	0 - 250	: 5	+100 - 250	: 5
0 - 80	: 2	0 - 300	: 5	+100 - 300	: 5
0 - 100	: 2	0 - 350	: 5	+100 - 350	: 5

AVAILABLE ON REQUEST :

- Capillary tube stainless steel
- Pocket in stainless steel AISI 316
- One way reset marking pointer
- Glycerine filling
- Accuracy : +/- 1 %
- Electrical contacts : 230 V 5 A or 230 V 10 A
- Dual scale °C+°F